

What Sets Viking® Boots Apart from Other Brands?

We focus on safety—not as a guide—but as a philosophy, making sure every boot we produce exceeds the standards and embraces comfort and wellness for the wearer.

We have developed unique last designs that allow us to produce boots that fit like a shoe, our "Snug Fit". We work with miners, foresters and firemen to understand their comfort issues, and introduced technologies in air and moisture control to help improve the wellness of those using our boots, and ergonomic insoles to enhance the comfort of the fit.

Snug Fit

Traditional "gum" boots, and injection molded boots are produced on a straight, widening shaft last, so as to make them strippable from the last.



The result is a loose fit with little ankle and arch support, causing increased fatigue and an overall sloppy feel. Viking® developed new, innovative, multi piece lasts, allowing us to taper the ankle area of the shaft to create a form fitting and supportive boot that can be easily removed from the last. We developed a new insole system with an ergonomic design to support the arch and improve the stability of the fit—the resulting "Snug Fit" design boots. Slip-on boots that feel like they are laced on; superior ankle/heel support to reduce incidences of ankle roll-over; superior arch support to reduce fatigue, finally a gum boot that moves with you, as part of you.

Now available in all Viking® light Chainsaw boots (VW58-1, VW59-1), Viking® Mining Boots (VW42), Viking® Ultimate Construction Boots (VW88), Viking® Firewall FR® Boots (VFW 60-1), Viking® Non-Safety Boots (WW22, VW23, VW29), Viking Handyman® Boots (VW3, VW 3-1) and Viking Firefighter® Boots (VW90, VW91).

Air, Moisture Control (AMC)

Viking® developed two socks to increase the wellness of the user of rubber boots.



VF22

The first is a dual layer thermal, acrylic/cotton, construction sockette that provides ventilation while wicking perspiration away from your feet. An external cotton layer to absorb and evaporate moisture. Acrylic fleece inside layer insulates while drawing perspiration from your feet to the cotton exterior.

VF25

The second was in response to abrasion and chaffing on the calve, due to perspiration buildup within the boot in more temperate environments (underground mining); we developed a triple layer Neoprene sock/bootie that transfers perspiration away from the calve, and through the top of the boot significantly reducing chaffing and abrasion.

Material

Rubber

Injection molded or handmade, rubber boots offer the highest level of abrasion, tear, and puncture resistance. Injected rubber boots can only offer limited safety features, being a steel toe cap and plate, with Electric Shock Resistance, whereas a handmade rubber boot can incorporate shin and metatarsal protection, chainsaw and circular saw protection, thermal heat and Hydro Carbon Flash fire protection, and one of the highest level of chemical resistance—safety features that provide workers with the highest level of safety assurance. With slip resistance the hot topic in safety today, rubber offers the highest level of slip resistance.













PU (Polyurethane)

Only produced through injection molding, polyurethane boots are generally soft and comfortable. Incorporating steel toe caps and plates, PU boots can also achieve Electric Shock Resistance. PU has good resistance to animal oils and fats, manure, and light solvents. It is typically used in specific industries (agriculture, food processing). PU offers a good level of slip

Injection Molded or Hand Made Industrial Safety Rubber Boots?

100% Waterproof Safety boots can be produced in two methods, by injection molding PU, PVC or TPR into a molded former, or by hand lasting layers of rubber. Injection molding is considerably more economical, but lacks the diversity in safety features a handmade boot can achieve. Handmade boots can use blended rubbers to achieve unique chemical, and abrasion resistances. Handmade boots can include metatarsal protection, as well as chainsaw and fire protection that injection boots cannot.

We focus on safety—not as a guide —but as a philosophy, making sure every boot we produce exceeds the standards and embraces comfort and wellness for the wearer.



Viking® Miner 49er Boots

- CSA M / ASTM Mt/75 Metatarsal protection
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric shock resistant 18kV
- European Standard CE Approved EN ISO 20345:2011
- Australia New Zealand Standard Approved AS/NZS 2210.3.2009
- · SBR blended NR upper with cotton canvas lining
- Highly chemical resistant rubber upper
- · Oil-, chemical-, abrasion-, heat-, slip-resistant, and air cushioned NBR lug
- 30% concentration Sodium Cyanide resistant >480 minutes
- · Achilles tendon and ankle protection
- · Compatitble with ice studs
- Ultra flexible: Exceeds 305,000 Flex Rating
- · Hang holes on the sides of the boots
- 14" Tall

















Viking[®] Miner 49er Tall Boots

- CSA M / ASTM Mt/75 Metatarsal protection
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- · CSA Omega Electric shock resistant 18kV
- European Standard CE Approved EN ISO 20345:2011
- Australia New Zealand Standard Approved AS/NZS 2210.3.2009
- · SBR blended NR boots with cotton canvas lining
- · Highly chemical resistant rubber upper.
- Oil-, chemical-, abrasion-, heat-, slip-resistant, and air cushioned NBR lug
- 30% concentration Sodium Cyanide resistant >480 minutes
- · Achilles tendon and ankle protection
- · Compatible with ice studs
- · Ultra flexible: Exceeds 305,000 Flex Rating





















Viking® MET Guard Boots

- · CSA M Metatarsal Protection
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- SBR blended NR upper with polyester lining
- Abrasion-, air cushioned, and slip-resistant 100% natural rubber lug sole
- · Highly chemical resistant rubber upper
- · Achilles tendon and ankle protection
- 14" height plus 2" nylon cuff to seal out debris, and dust
- Snug fit design to provide extra comfort and safety and reduce incidences of ankle roll-over
- · Compatible with ice studs
- · Ultra flexible: Exceeds 305,000 Flex Rating
- · Ergonomic insoles (VF23) included



VW42

Browse through our Industrial Wear Catalog. The Items that are on our website are the items we stock. However we can special order most of the items in this catalog. Some limitations may apply

Viking® Bushwhacker Boots

- CSA Z195-14 "Green Fir Tree" chainsaw protection - Chainsaw Protection (Highest Class - Class 3: 28m/sec chainsaw speed as per EN ISO 17249: 2013)
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- Snug Fit design and ergonomic insole
- SBR blended NR upper with cotton canvas lining
- · Highly chemical resistant rubber upper
- · Nylon cuff to seal out debris and dust
- · Abrasion-, chemical-, and oil-resistant NBR lug sole
- Air-cushioned heel with achilles tendon, ankle and metatarsal protection
- Ultra flexible: Exceeds 305,000 Flex Rating

VW58-1

- · CSA Omega Electric shock resistant 18kV
- · Compatible with ice studs















- · NBR caulked sole
- · Spiked sole having limited chemical resistance













Viking® Winter Bushwhacker Boots

- CSA Z195-14 "Green Fir Tree" chainsaw protection
- Chainsaw Cut Protection Class 3 (28m/sec chainsaw speed as per EN ISO 17249:2013)
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric shock resistant 18kV
- Made of SBR blended NR for maximum chemical protection
- · High impact, abrasion-, chemical-, and oil-resistant NBR lug sole
- · Highly chemical resistant rubber upper
- Removable foam liner provides warmth for up to -70°C/-100°F
- · Air-cushioned heel with achilles tendon, ankle, and metatarsal protection
- · Compatible with ice studs
- Ultra flexible: Exceeds 305,000 Flex Rating







Viking® Timberwolf Boots

- · CSA Z195-14 'Green Fir Tree' chainsaw protection
- Chainsaw Cut Protection Class 3 (28m/sec chainsaw speed as per EN ISO 17249:2013)
- CSA Z195-14 / ASTM F2413-11 Grade 1 steel toe and plate
- SBR blended NR upper with cotton canvas lining
- · High impact, abrasion-, chemical-, and oil-resistant NBR lug sole
- · Highly chemical resistant rubber upper
- · Achilles tendon, ankle protection
- · Rubber lace collar with safety reflective stripe
- Ultra flexible: Exceeds 305,000 Flex Rating

VW68-1

- CSA Omega Electric shock resistant 18kV
- · Compatible with ice studs













VW69-1

- · NBR caulked sole
- · Spiked sole having limited chemical resistance



















Viking® Black Tusk® Boots

- · CSA "Green Fir Tree" chainsaw protection
- · Chainsaw Protection (Highest Class Class 3: 28m/sec chainsaw speed as per EN ISO 17249:2013)
- · Leather top, rubber bottom, and cotton canvas lining
- · Achilles tendon, ankle and metatarsal protection

VW78-1

- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric shock resistant 18kV
- Abrasion-, oil-, chemical-, and slip-resistant NBR lug sole
- · Compatible with ice studs



Size 5 - 15









VW79

- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe only
- · SBR blended NR caulked sole
- · Spiked sole having limited chemical resistance









Viking® Leather Chainsaw Boots

- · CSA Z195-14 "Green Fir Tree" chainsaw protection
- Chainsaw Protection (Highest Class Class 3: 28m/sec chainsaw speed as per EN ISO 17249:2013)
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- · Lightweight The genuine leather upper and lower construction of the boot significantly decreases the weight in comparison to having rubber bottom
- · Water-resistant full cow grain leather upper
- · Abrasion-, Oil-, chemical-, and slip-resistant NBR lug sole
- · Quick dry nylon lining and soft footbed insole
- · Air-cushioned heel with achilles tendon and ankle protection
- · Laced up design for maximum comfort and a tighter fit to prevent from ankle roll and foot fatigue

Size 6 - 12



CLASS 2 CHAINSAW BOOTS



VW77-1



Viking® Class 2 Chainsaw Boots

- ASTM F1818 chainsaw protection
- Chainsaw Protection (Mid Class 24m/sec chainsaw speed EN ISO 17249:2013)
- ASTM F2413-11 Grade 1 steel toe
- · SBR blended NR upper with cotton canvas lining
- · Highly chemical resistant rubber upper
- · Abrasion-, oil-, chemical-, and slip-resistant NBR lug sole
- · Achilles tendon, and ankle protection
- · Air-cushioned heel
- · Rubber lace collar with safety reflective stripe
- · Ultra flexible: Exceeds 305,000 Flex Rating

Size 6 - 14





VW64-1

· Compatible with ice studs

VW65

- · NBR caulked sole
- · Spiked sole having limited chemical resistance

Viking® Ericsen® Boots

- CSA Z195-14 / ASTM F2413-11 Grade 1 steel toe only
- · CSA Omega Electric shock resistant 18kV
- · Leather top, rubber bottom, and cotton canvas lining
- · Abrasion-, oil-, chemical-, and slip-resistant NBR lug sole
- · Reinforced heel area
- · Ballistic nylon cut-resistant protection in shin and toe area
- · Compatible with ice studs

















Viking® Spiked Forester® Boots

- · SBR blended NR rubber boots with polyester lining
- · Highly chemical resistant rubber upper
- · Polyester flap behind laces
- · Reinforced heel and instep
- SBR blended NR caulked sole
- · Used for forestry, surveying, and roofing
- · Ultra flexible: Exceeds 305,000 Flex Rating

VW56

· Soft toe

Size 6 - 13



VW57

• CSA Z195-14 / ASTM F2413-11 Grade 1 steel toe only







DIELECTRIC BOOTS

Harvik by Viking® 12" Dielectric Safety Boots

- CSA Z195-14 / ASTM F2413-11 Grade 1 steel toe only
- CSA Omega Electric shock resistant 18kV
- · Individually tested, withstanding voltage up to 10 kV in wet condition, and 37 kV in dry condition
- · Dieletric boots contain 200 Joule Epoxy coated steel toe
- · SBR blended NR upper with polyester lining
- · Highly chemical-resistant rubber upper
- · Extra shin protection
- · Cut-off line to make boot shorter
- · Abrasion-, chemical-, oil-, heat- and slipresistant, and air cushioned vulcanized NBR lug sole for inimical environment
- Resistance to hot contact 300°C/527°F for 60 seconds
- · Ultra flexible: Exceeds 305,000 Flex Rating
- · Packaged individually















82 2017/18



VW91

VW90



VW93

Viking Firefighter® Chainsaw Boots

- NFPA: 1971 2013 protective footwear for structural fire fighting
- NFPA: 1992 2012 liquid splash-protective against hazardous material emergencies
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Z195-14 "Green Fir Tree" chainsaw protection Chainsaw Protection (Highest Class 3 (28m/sec chainsaw speed as per EN ISO 17249:2013)
- CSA Omega Electric shock resistant 18kV
- Extra comfort non-woven para/meta aramid FR lining excellent flame resistant
- 16" tall Snug-fit design and ergonomic insole, plus the optional felt insole to adjust fit
- Highly chemical resistant rubber upper
- · Flame retardant rubber upper
- Reinforced backstay for heel tendon protection
- Metatarsal, shin impact, and chainsaw protection through multiple layers of polyaramide, and rubber
- Shaft is also lined with polyaramide for protection
- Ankle padding protection and foam midleg padding for additional support
- Viking NJV outsole abrasion-, chemical- and slip-resistant chloroprene rubber outsole
- · Ultra flexible: Exceeds 305,000 Flex Rating
- Safety reflective patch on the back of the boot
- Heavy-duty rubber pull straps
- · Half sizes available





Size 4 - 15 Size 4.5 - 11.5









Viking Firefighter® Felt Lined Boots

- NFPA: 1971 2013 protective footwear for structural fire fighting
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric shock resistant 18kV
- · Chemical resistant tested as per EN 13832-1:2006
- 14" tall Snug Fit design and ergonomic orthotic insole
- · Flame retardant rubber upper with grey felt lining
- · Highly chemical-resistant rubber upper
- · Vamp and leg lined with felt lining material for comfort and thermal insulation
- Reinforced backstay for heel/tendon protection
- Steel mid sole for footstep protection against penetration
- · External rubber shin guard adds protection and comfort while working on ladders
- · Abrasion-, oil-, chemical-, slip-resistant, and heat-retardant chloroprene rubber lug sole
- · Safety reflective patch on the side of the boot
- · Heavy-duty rubber pull straps
- Ultra flexible: Exceeds 305,000 Flex Rating
- · Compatible with ice studs



Size 5 - 14 Size 8.5 - 11.5











Harvik® by Viking® Firefighter Boots

- NFPA: 1971 2013 protective footwear for structural fire fighting
- NFPA: 1992 2012 liquid splash-protective against hazardous material emergencies
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- · CSA Omega Electric shock resistant 18kV
- 16" tall classic fit design
- · Flame retardant rubber upper with polyaramide lining
- · Highly chemical-resistant rubber upper
- Extra comfort non-woven para/meta aramid FR lining with excellent flame resistant properties
- Reinforced backstay for heel/tendon protection
- Steel mid sole for footstep protection against penetration
- · External rubber shin guard adds protection and comfort while working on ladders
- · Shaft is also lined with polyaramide for protection
- · Abrasion-, oil-, chemical-, heat-, and slip-resistant chloroprene rubber NJV sole
- Safety reflective patch on the side and back of the boot
- Ankle padding protection and foam midleg padding for additional support
- · Heavy-duty pull straps
- Ultra flexible: Exceeds 305,000 Flex Rating (ASTM 300 KRATING











Viking[®] Firewall[™] Rigger Boots

- Meets CGSB 155.20 Hydrocarbon Flash Fire Protection; Thermal Protective Protection (TPP) with the spacer 58 cal/cm² and TPP without spacer 58.8 cal/cm²
- CSA Z195-14/ASTM F2413-11 Grade 1 steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
- CSA M / ASTM Mt/75 Metatarsal protection
- NBR blended NR rubber boots with polyester lining
- NBR rubber for maximum chemical protection
- · Fire retardant upper provides flame and thermal protection
- Self-cleaning NBR lug sole
- 30% concentration Sodium Cyanide resistant >480 minutes
- Reinforced heel and instep
- Cement-. fuel-, and oil-resistant sole
- Sole resistant to 300°C/572°F hot contact
- Super slip-resistant
- Ergonomic orthotic insoles included
- · Hang up holes on the sides of each boot
- · Snug fit design to provide extra comfort and safety and reduce incidences of ankle roll-over
- 12" tall boot

Size 6 - 14

- Ultra flexible: Exceeds 305.000 Flex Rating
- · Compatible with ice studs







VFW60-1

Viking[®] Firewall[™] MET Guard Boots

- Meets CGSB 155.20 Hydrocarbon Flash Fire Protection; Thermal Protective Protection (TPP) with the spacer 58 cal/cm² and TPP without spacer 58.8 cal/cm²
- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA M / ASTM Mt/75 Metatarsal protection
- CSA Omega Electric Shock Resistant 18kV
- NBR blended NR upper with polyester lining
- · Highly chemical-resistant rubber upper
- · Reinforced heel and instep
- · Self-cleaning NBR lug sole
- · Fire retardant upper provides flame and thermal protection
- · Abrasion-, oil-, chemical-, slip-, and heat-resistant choloroprene lug sole 300 Krating
- Sole resistant to 300°C/572°F hot contact
- Ultra flexible: Exceeds 305,000 Flex Rating

· Compatible with ice studs















CONSTRUCTION BOOTS

Viking® Ultimate® Construction Boots

- CSA Z195-14/ ASTM F2413-11 Grade 1 Steel toe and plate
- · CSA Omega Electric Shock Resistant 18kV
- Chainsaw Protection (Mid Class: 24 m/sec chainsaw speed as per EN ISO #17249:2013)
- EN ISO 20345:2011 SB PE HRO FO SRA
- · SBR blended NR upper with cotton canvas lining
- · Highly chemical-resistant rubber upper
- · Circular saw cut resistance
- 15" in height, 3" nylon cuff with adjustable toggle to keep debris out
- Only 3% of degradation after immersed in cement for 70 hours
- · Reinforced achilles protection
- · Kick off spur
- · Abrasion-, oil-, chemical-, heat-, and slip-resistant, and air cushioned NBR lug sole
- 30% concentration Sodium Cyanide resistant >480 minutes
- · Protection against slipping into rebar; preventing bruising, lacerating of the
- Slip-resistant soles resistant to 300°C/572°F hot contact
- Snug-fit design to reduce foot fatigue and ankle rollover
- Ultra flexible: Exceeds 305,000 Flex Rating
- Compatible with ice studs











For Current Pricing and Availability Call 1-800-561-3600 or email info@bapequipment.com



VW88

84 2017/18



Viking® Work Boots

- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
- SBR blended NR upper with polyester lining
- Highly chemical resistant rubber upper
- · Polyester flap behind laces
- · Self-cleaning lug sole
- Reinforced heel and instep
- Abrasion-, oil- chemical-, heat-, and slip resistant SBR blended NR outsole
- · Used for construction, road work, farm work and forestry
- · Ultra flexible: Exceeds 305,000 Flex Rating
- · Compatible with ice studs

Size 4 - 6 available for booking







Viking Journeyman® Boots

- CSA Z195-14/ ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
- · SBR blended NR upper with cotton canvas lining
- · Highly chemical resistant rubber upper
- Abrasion-, oil-, chemical-, heat-, and slip-resistant, SBR blended NR outsole
- Self-cleaning lug sole
- Ultra flexible: Exceeds 305,000 Flex Rating
- · Compatible with ice studs



Size 5 - 15





Viking Handyman® Rubber Boots

- Industrial strength 100% waterproof, handcrafted natural rubber
- Superior slip resistance compared to PVC and PU (2 to 3 times better)
- Abrasion-, oil-, chemical-, heat-, and slip-resistant, SBR blended NR outsole
- Self-cleaning lug sole
- Snug Fit design to reduce foot fatigue and ankle rollover
- Super lightweight; approximately 40% lighter than PU or PVC
- 14" in height
- Ultra flexible: Exceeds 305,000 Flex Rating

VW3

- Soft Toe
- Boot weight: 1.65-1.70kg/pair (3.64-3.75lbs)



SNUG THE SOUR FLEX

VW3-1

- CSA Z195-14/ ASTM F2413-11 Grade 1 steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
- European Standard CE Approved
- EN ISO 20345:2011
- Boot weight: 1.95-2kg/pair (4.30-4.41lbs)







Viking® Non-Safety Boots

- 16" Rubber boots
- · NR blended NBR with polyester lining
- Superior resistance to chemical acids, and organic compounds (ie: Sugar, and agro-farm chemical)
- Designed to be resistant to: animal fats, fish oils, Ketone, paint solvents, fuel oil mix, oil, and grease
- · Self-cleaning, flexible, non-slip chevron NBR sole with smooth non-net catching design
- Ergonomic "SNUG-FIT" last design: ankle fitted for excellent support and comfort
- Comfortable ergonomic insole (removable)
- · Steel shank for stability
- Ultra flexible: Exceeds 305,000 Flex Rating







Viking® Insulated Safety Boots

- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe only
- 16" Rubber boots
- NR blended NBR upper with neoprene lining
- · Superior resistance to chemical acids, and organic compounds (ie: Sugar, and agro-farm chemical)
- · Designed to be resistant to: animal fats, fish oils, Ketone, paint solvents, fuel oil mix, oil, and grease
- Self-cleaning, flexible, non-slip chevron NBR sole with smooth non-net catching design
- Ergonomic "SNUG-FIT" last design: ankle fitted for excellent support and
- · Comfortable ergonomic insole (removable)
- · Steel shank for stability
- · Ultra flexible: Exceeds 305,000 Flex Rating









Viking® Non-Safety Insulated Boots

- 16" Rubber boots
- · NR blended NBR upper with neoprene lining
- · Superior resistance to chemical acids, and organic compounds (ie: Sugar & agro-farm chemical)
- · Designed to be resistant to: animal fats, fish oils, Ketone, paint solvents, fuel oil mix, oil, and grease
- Self-cleaning, flexible, non-slip chevron NBR sole with smooth non-net catching design
- Ergonomic "SNUG-FIT" last design: ankle fitted for excellent support and comfort
- · Comfortable ergonomic insole (removable)
- · Steel shank for stability
- · Ultra flexible: Exceeds 305,000 Flex Rating

Browse through our Industrial Wear Catalog. The Items that are on our website are the items we stock. However we can special order most of the items in this catalog. Some limitations may apply





- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
- ASTM Mt/75 Metatarsal protection

Viking® Water Jet Boots

- European Standard CE Approved EN ISO 20345:2011
- · High chemical and abrasion resistance
- NBR rubber for maximum chemical protection
- · Oil-, chemical-, and slip-resistant sole
- · Reinforced backstay for heel/tendon protection
- · Steel shank and air cushioned sole pockets
- · Adjustable nylon guard keeps out water and debris
- AMC socks (VF22) included
- · Air moisture control socket for comfort
- · Heavy-duty cotton canvas lining
- · Ultra flexible: Exceeds 305,000 Flex Rating















RECREATIONAL BOOTS







Evolution by Viking® ComfortLite Boots

- · 100% Waterproof
- · Deliver industrial grade durability, anti-slip resistance, and resistance against chemicals, and abrasion
- · Ultra-lightweight, comfortable, and flexible
- · Rubber construction increases strength and durability
- · Upper properties achieve acid and alkali resistance
- · Lug sole enhances traction over rough terrains
- Double rubber ladder shank improves stability and support
- · Neoprene liner provides enhanced warmth and comfort
- · Non-marking sole
- Ultra flexible: Exceeds 305,000 Flex Rating
- Retail packaging



Retail packaging





Viking® Mariner Kadett Boots

- SBR blended NR 10" boots with polyester lining
- · 100% Waterproof
- Slip-resistant 100% Natural Rubber outsole
- · Removable orthopedic designed insole
- · Unisex fit
- · Non-marking sole



VW24

Browse through our Industrial Wear Catalog. The Items that are on our website are the items we stock. However we can special order most of the items in this catalog. Some limitations may apply

Viking® Mariner Boots

- SBR blended NR 16" boots
- 100% Waterproof
- 100% Natural Rubber upper with polyester lining for extra comfort and
- · Sperry soles for ultimate slip resistance on fibre glass
- · 3 lace rear bellows
- · Non marking soles
- · Unisex fit
- · Removable orthopedic designed insole
- · Retail packaging







Size 3 - 13

Viking® Gator Marine Boots

- Insulated SBR blended NR boots for cold weather protection
- Non-slip chevron deck rubber sole in non-netcatching design
- · Steel shank for extra stability
- · Adjustable belt collar to seal out water and snow
- Extra wide calves for easy entry
- · Alaska tested for warmth and comfort
- Warm pile insulated lining good to -20°C / -4°F
- Ultra flexible: Exceeds 305,000 Flex Rating

VW37

• 13" tall







• 15" tall













Browse through our Industrial Wear Catalog. The Items that are on our website are the items we stock. However we can special order most of the items in this catalog. Some limitations may apply



VW12-1

Viking® Arctic Extreme Boots

- CSA Z195-14 / ASTM F2413-11 Grade 1 Steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
- · Cold weather protection
- SBR blended NR upper with cotton canvas lining for extra comfort
- · Abrasion-, oil-, chemical-resistant sole suitable for inimical environment
- Slip-resistant, self-cleaning NBR lug sole
- Removable foam liner provides warmth for up to -70°C/-100°F
- 420 Denier nylon rip-stop collar with black lace tie
- Ultra flexible: Exceeds 305,000 Flex Rating
- · Compatible with ice studs





Viking® Leather Winter Boots

- CSA Z195-14 / ASTM F2413-11 Grade 1 steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
- Removable foam liner provides warmth for up to -70°C/-100°F
- Durable, handcrafted 100% water-resistant full cow grain leather upper and lace up design for maximum comfort and a tighter fit to prevent from ankle roll and foot fatigue
- Oil-, chemical-, fuel- and slip-resistant NBR lug sole suitable for inimical environment
- · Natural rubber bottom and cotton canvas lining
- Pull-on tab

Size 6 - 14

- · Reinforced heel area
- · Compatible with ice studs











VW75-3

VW3-3



VW3-1-3

Viking Handyman® Winter Rubber Boots

- Industrial strength 100% waterproof, handcrafted natural rubber
- Removable foam liner provides warmth for up to -70°C/-100°F
- Better slip resistance than PVC and PU
- · Abrasion-, oil-, chemical-, heat-, and slip-resistant, SBR blended NR outsole
- · Self-cleaning lug sole
- Super lightweight; approximately 40% lighter than PU or PVC
- Ultra flexible: Exceeds 305,000 Flex Rating
- 14" tall

VW3-3

- · Soft toe
- Boot weight: 2.13 2.18 kg/pair (4.70 4.81 lbs)

Size 6 - 14





VW3-1-3


- CSA Z195-14/ ASTM F2413-11 Grade #1 steel toe and plate
- CSA Omega Electric Shock Resistant 18kV
 Boot weight: 2.43 2.48 kg/pair (5.36 5.47 lbs)









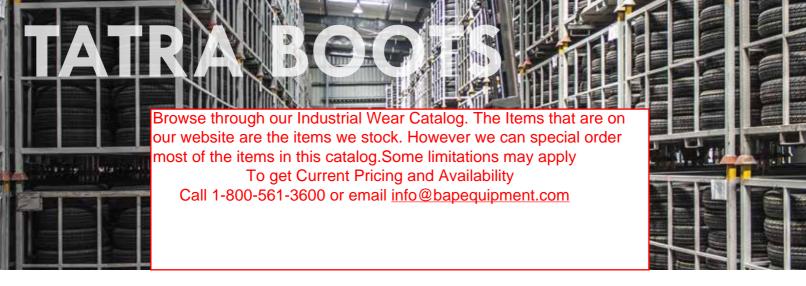

Tatra boot customers are workers that work in environments where they are on concrete, in warehouses, on scaffolding, and hardpan ground, they need surface contact for sure grip—Tatra's designs provide the best of this. We tested the slip resistance of the outsoles on our Harvik EN Slip Resistant testing equipment and they pass SRA and SRB, therefore are SRC—the highest level of slip resistance.

Most boot makers know that rubber to leather vulcanizing is the best form of sole attachment. However, rubber compounds are generally higher density and therefore heavy. The industry moved to using PU as a midsole with a rubber outsole to reduce the weight, or went fully to PU injected soles. Most "rugged" sole leather boots you see today are PU injected, they look rugged, but in fact are very poor in abrasion, chemical and puncture resistance, and therefore don't have long life span.

Unique, Long-Lasting Sole System

Tatra invented a patent pending process to adhere Rubber to PU to Leather that eliminates the common delamination problem with PU midsoles and PU injection soles—they delaminate within 3 to 6 months from the leather due to deterioration of the glue/cement. This is the #1 cause of early failure in leather footwear—the sole comes off.

We took Tatra's patent pending technology, combined this with our rubber compounding formulas to build a sole system that we GUARANTEE will not separate, crack, or tear for at least 2 years! This increases the life span of Tatra footwear to over 4 times the average of safety boots in the \$100 retail range.

Tough, Solid Safe Footwear

Tatra builds boots that prevent injury, provide solid integrity in construction to allow comfortable use with shovels, ladder climbing, re-bar climbing, and walking on rough terrain. We use RUBBER—better slip resistance, better abrasion resistance, better chemical resistance; the result—a boot sole that meets and substantially exceeds the rigors of today's workers in tough, rough, and harsh environments. Tatra boots will reduce injuries related to ankle twists, foot fatigue, metatarsal impact, and punctures, while providing excellent value in life span and performance. If you are going to work in harsh environments—make your footwear rugged, tough, solid, and safe!

Boot soles that meet and substantially exceed the rigors of today's workers in tough, rough, and harsh environments.





Sole Separation

Tatra Footwear utilizes a revolutionary patent pending sole attachment process ensuring the strongest bond between the PU midsole and a rubber outsole.

Stitchina

Why Tatra?

Tatra uses only the highest quality, high tensile strength thread, stitched using a strong lockstitch sewing technique followed by a backstitch. This ensures the stitching will not unravel or fray.

Quality of Leather

Tatra builds footwear using the highest quality leather from cowhides sourced in the USA. Cow hides are stronger, thicker, and less prone to getting torn than any other animal hides, like water buffalo. This leather is also suppler, more flexible, resistant to heat and sun damage, and repels moisture better than any other leather. Tatra only uses 2.0mm-2.2mm leather, far above the industry norm, to ensure the durability, ruggedness, and longevity of the footwear we produce.

Internal Metguard

Tatra's patented internal metguard ("flexguard") is the best in market due to its safety performance, flexibility, comfort, and durability. The "flexguard" internal metguard is designed to exceed the minimum protection standards of CSA Z195-M75 certification and provides the highest level of metatarsal protection in the industry.

Value through Quality

Tatra footwear are built the right way, using the right ingredients to create footwear that will not fail.

We took Tatra's patent pending technology and combined this with our rubber compounding formulas to build a sole system that we guarantee will not separate, crack, or tear for at least 2 years.

90 2017/18



Tatra 6" Internal Flexguard™ Safety Boots

- CSA Steel Toe and Lenzi Plate / Swen-flex Pro® puncture-resistant insole
- CSA Electric Shock Resistance (E.S.R.)
- CSA Z195-14 Grade 1 Approved
- ASTM F2413-11 Approved
- CSA M / ASTM Mt/75 Metatarsal protection
- Patented Flexguard™ Metatarsal Protection contours to the foot and reduces the hazard of tripping
- Patented internal Flexguard[™] technology provides superior flexibility, increased protection, and maximum comfort
- Patent pending sole attachment technology protects against sole separation
- · Breathable waterproof membrane for enhanced moisture control
- · Extra leather for increased heel protection
- Bumper toe and wide fitting CSA steel toe cap for improved comfort
- Polyurethane removable insole for added comfort and anti-fatigue
- Oil- and acid-resistant rubber outsole for enhanced slip resistance

Size 4 - 5 available for booking

Size 6 - 13





F6817

Tatra 8" Internal Flexguard™ Leather Safety Boots

- CSA Steel Toe and Lenzi Plate / Swen-flex Pro® puncture-resistant insole
- CSA Electric Shock Resistance (E.S.R.)
- CSA Z195-14 Grade 1 Approved
- ASTM F2413-11 Approved
- CSA M / ASTM Mt/75 Metatarsal protection
- Patented Flexguard™ Metatarsal Protection contours to the foot and reduces the hazard of tripping
- Patented internal Flexguard™ technology provides superior flexibility, increased protection, and maximum comfort
- Patent pending sole attachment technology protects against sole separation
- Breathable waterproof membrane for enhanced moisture control
- · Extra leather for increased heel protection
- · Bumper toe and wide fitting CSA steel toe cap for improved comfort
- Polyurethane removable insole for added comfort and anti-fatigue
- · Oil- and acid-resistant rubber outsole for enhanced slip resistance

Size 4 - 5 available for booking

Size 6 - 13



Tatra 8" Side Zipper Boots

- CSA Steel Toe and Lenzi Plate / Swen-flex Pro® puncture-resistant insole
- CSA Electric Shock Resistance (E.S.R.)
- CSA Z195-14 Grade 1 Approved
- ASTM F2413-11 Approved
- Patent pending sole attachment technology protects against sole separation
- Black genuine waterproof leather upper
- Waterproof and breathable Dri-Brelle® membrane lining
- · Wide-fitting steel toe cap with edge gasket
- Sealed seam tape stitching technology
- Polyurethane removable insole for added comfort and anti-fatigue
- Oil- and acid-resistant rubber outsole for enhanced slip resistance



Size 4 - 5 available for booking

Size 6 - 13



Tatra 6" Black Slip-on Leather Welders Gaiter Safety Boots

- CSA Steel Toe and Lenzi Plate / Swen-flex Pro® puncture-resistant insole
- CSA Electric Shock Resistance (E.S.R.)
- CSA Z195-14 Grade 1 Approved
- ASTM F2413-11 Approved
- CSA M / ASTM Mt/75 Metatarsal protection
- · External Metguard protects against sparks and molten metal
- · Patent pending sole attachment technology protects against sole separation
- · Elasticized gaiter style for easy slip-off
- Wide-fitting steel toe cap with edge gasket
- · Polyurethane removable insole for added comfort and anti-fatigue
- Oil- and acid-resistant rubber outsole for enhanced slip resistance



E5617

Size 4 - 5 available for booking





Tatra 8" External Metatarsal Protective Boots

- CSA Steel Toe and Lenzi Plate / Swen-flex Pro® puncture-resistant insole
- CSA Electric Shock Resistance (E.S.R.)
- CSA Z195-14 Grade 1 Approved
- ASTM F2413-11 Approved
- CSA M / ASTM Mt/75 Metatarsal protection
- · External Metguard protects against sparks and motlen metal
- · Patent pending sole attachment technology protects against sole separation
- · Black genuine waterproof leather upper with latex-sealed stitching
- · Waterproof and breathable Dri-Brelle® membrane lining
- Wide-fitting steel toe cap with edge gasket
- 4 row Nomex®/Kevlar® stitching on vamp
- · Polyurethane removable insole for added comfort and anti-fatigue
- · Oil- and acid-resistant rubber outsole for enhanced slip resistance



E6817

Size 4 - 5 available for booking

Size 6 - 13





- CSA Steel Toe and Lenzi Plate / Swen-flex Pro® puncture-resistant insole
- CSA Electric Shock Resistance (E.S.R.)
- CSA Z195-14 Grade 1 Approved
- ASTM F2413-11 Approved
- CSA M / ASTM Mt/75 Metatarsal protection
- Patented Flexguard[™] Metatarsal Protection contours to the foot and reduces the hazard of tripping
- Patented internal Flexguard™ technology provides superior flexibility, increased protection, and maximum comfort
- · Patent pending sole attachment technology protects against sole separation
- Breathable waterproof membrane for enhanced moisture control
- Nomex®/Kevlar® threads protect stitching from chemicals and heat
- Extra leather for increased heel protection
- · Quadruple stitching for superior durability
- Stitching is seam sealed for waterproof protection
- Bumper toe and wide fitting CSA steel toe cap for improved comfort
- · Polyurethane removable insole for added comfort and anti-fatigue
- Oil- and acid-resistant rubber outsole for enhanced slip resistance

Size 4 - 5 available for booking







F6817BWP

92



Beking® StepliteX Boots

- · Foamed PU waterproof construction with soft toe
- Long-lasting, tough-wearing PU remains flexible at -30°C / -22°F
- · Enhanced comfort: wider fitting
- · Anti-bacterial and abrasion-resistant lining
- Kick-off spur for quick removal
- · Anti-clogging sole for added slip resistance
- Shock-absorbent heel
- Cut-off line to make shorter boot from 15" to 11.5"
- · Lightweight, comfortable, and flexible
- Ergonomic, shock-absorbing, washable footbeds
- Resistant to mineral, manure, vegetable and animal oil or fats, blood and various chemical cleaning products

Size 4 - 15



Bekina® StepliteX Safety Boots

- CSA Z195-14 Grade 1 composite toe cap and midsole
- CSA Omega Electric Shock Resistant 18kV
- · Foamed PU waterproof construction
- Long-lasting, tough-wearing PU remains flexible at -30°C / -22°F
- Enhanced comfort: wider fitting
- · Anti-bacterial and abrasion-resistant lining
- · Kick-off spur for quick removal
- Anti-clogging sole for added slip resistance
- Shock-absorbent heel
- Cut-off line to make shorter boot from 15" to 11.5"
- · Lightweight, comfortable, and flexible
- Ergonomic, shock-absorbing, washable footbeds
- Resistant to mineral, manure, vegetable and animal oil or fats, blood and various chemical cleaning products

Size 4 - 15









Bekina® StepliteXCi Safety Boots

- CSA Z195-14 Grade 1 composite toe cap and midsole
- CSA Omega Electric Shock Resistant 18kV
- Foamed PU waterproof construction
- Thermal insulation good up to -40°C / -40°F
- · Enhanced comfort: wider fitting
- · Anti-bacterial and abrasion-resistant lining
- · Kick-off spur for quick removal
- Aggressive winter anti-clogging soles for added slip resistance
- · Shock-absorbent heel
- Cut-off line to make shorter boot from 15" to 11.5"
- · Lightweight, comfortable, and flexible
- Ergonomic, shock-absorbing, washable footbeds
- Resistant to mineral, manure, vegetable and animal oil or fats, blood and various chemical cleaning products

Size 4 - 15

Bekina® Thermolite Insulated Safety Boots



- CSA Omega Electric Shock Resistant 18KV
- Extra thick microfoam PU compound that's warmer, lighter and longer wearing
- Thermal insulation good up to -50°C / -58°F
- 15" tall; Ergonomic sole design for easy walking
- · Anti-bacterial and abrasion-resistant lining
- · Extra wide toe, vamp and shaft for a more comfortable fit
- Shock-resistant heel and anti-slip, self-cleaning sole
- Ergonomic, shock-absorbing, washable footbeds
- Resistant to mineral, manure, vegetable and animal oil or fats, blood and various chemical cleaning products







Z090GG



Viking® Radiantex Boot Liners

- Designed to fit all Viking[®] hand crafted rubber boots
- Polypropylene and wool blend with a Radiantex layer for maximum warmth (up to -30°C)
- The Radiantex metallized membrane acts as a thermal reflector and moisture barrier keeping body heat in and allowing perspiration vapors to escape
- Front elastic holds lining in position
- · Zig zag sewing for extra strength
- · Vinyl heel protector for wear resistance
- Sole features outside seams for a comfortable fit

Size 7 - 15



Viking® AMC Socks

- Designed to fit all full rubber and rubber bottom boots
- The dual layer thermal, acrylic/cotton,construction provides ventilation while wicking perspiration away from your feet.
- Outside cotton layer to absorb and wick moisture
- Acrylic fleece inside layer insulates while drawing perspiration from your feet





Size 4/5 - 14/15



Viking® Premium Ergonomic Insoles

- · Shock absorber
- Adds ankle support
- · Anti-foot fatique
- · Moisture control air vents
- · Soft and thick cushion



Viking[®] Sponge Felt Insoles

- Acrylic fleece insulates while drawing perspiration away from your feet
- Rubber coated anti-slip bottom holds insole in place

VF23

VF21

Size 6/7/8 - 12/13/14

VF24

Size 6/7/8 - 12/13/14



Viking® AMC Neoprene Socks

- Triple layer air moisture control system provides ventilation while wicking away perspiration from your feet
- Conforms to your feet for maximum comfort
- Ideal for rubber or PU boots
- Machine washable



Bekina[®] Insoles

- · Antimicrobial treatment
- Shock-absorbing cushioning effect
- Slip-resistant, and odour-resistant
- Fits X210, X290, XC90, Z090

VF25

Size 6/7 - 12/13

VF26

Size 3 - 15



- · Neoprene insulated
- Designed to fits same size boots
- Good up to -70°C / -100°F when worn together with rubber boots
- Fits VW3-3, VW3-1-3, VW12-1, and VW58-3



Viking® Ice Studs

- Great for enhancing traction on boots
- Comes with one applicator and 35 studs



VF28

Size 6 - 14

IS

94 2017/18